# **ON Semiconductor**

# Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

# **Dual Buffer**

# **NL27WZ16**

The NL27WZ16 is a high performance dual buffer operating from a  $1.65\ V$  to  $5.5\ V$  Supply.

#### **Features**

- Designed for 1.65 V to 5.5 V V<sub>CC</sub> Operation
- 2.4 ns  $t_{PD}$  at  $V_{CC} = 5 \text{ V (Typ)}$
- Inputs/Outputs Overvoltage Tolerant up to 5.5 V
- I<sub>OFF</sub> Supports Partial Power Down Protection
- Sink 32 mA at 4.5 V
- Available in SC-88, SC-74, and UDFN6 Packages
- Chip Complexity < 100 FETs
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant





Figure 1. Logic Symbol



# ON Semiconductor®

#### www.onsemi.com









UDFN6 1.45x1.0, 0.5P CASE 517AQ





UDFN6 1x1, 0.35P CASE 517BX



X, XXX = Specific Device Code

M = Date Code\*

■ Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

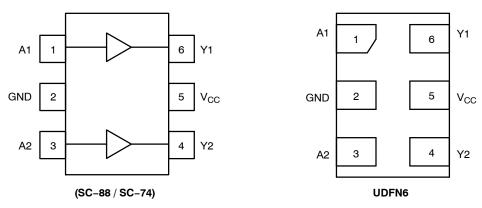


Figure 2. Pinout (Top View)

# PIN ASSIGNMENT

Pin	Function
1	A1
2	GND
3	A2
4	Y2
5	V <sub>CC</sub>
6	Y1

# **FUNCTION TABLE**

A Input	Y Output
L	L
Н	Н

#### **MAXIMUM RATINGS**

Symbol	Characteristics	Characteristics				
V <sub>CC</sub>	DC Supply Voltage	SC-88 (NLV) SC-88, SC-74, UDFN6	-0.5 to +7.0 -0.5 to +6.5	V		
$V_{IN}$	DC Input Voltage	SC-88 (NLV) SC-88, SC-74, UDFN6	-0.5 to +7.0 -0.5 to +6.5	V		
V <sub>OUT</sub>	DC Output Voltage SC-88 (NLV)	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	-0.5 to V <sub>CC</sub> +0.5 -0.5 to +7.0 -0.5 to +7.0	V		
	DC Output Voltage SC-88, SC-74, UDFN6	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	-0.5 to V <sub>CC</sub> +0.5 -0.5 to +6.5 -0.5 to +6.5	V		
I <sub>IK</sub>	DC Input Diode Current, V <sub>IN</sub> < GND		-50	mA		
I <sub>OK</sub>	DC Output Diode Current, V <sub>OUT</sub> < GND		-50	mA		
I <sub>OUT</sub>	DC Output Source/Sink Current		±50	mA		
I <sub>CC</sub> or I <sub>GND</sub>	DC Supply Current per Supply Pin or Ground Pin		±100	mA		
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C		
TL	Lead Temperature, 1 mm from Case for 10 secs		260	°C		
TJ	Junction Temperature under Bias		+150	°C		
$\theta_{\sf JA}$	Thermal Resistance (Note 2)	SC-88 SC-74 UDFN6	377 320 154	°C/W		
P <sub>D</sub>	Power Dissipation in Still Air	SC-88 SC-74 UDFN6	332 390 812	mW		
MSL	Moisture Sensitivity		Level 1	_		
F <sub>R</sub>	Flamebility Rating	Oxygen Index: 28 to 34	UL 94-V-0 @ 0.125 in	-		
V <sub>ESD</sub>	ESD Withstand Voltage (Note 3)	Human Body Model Charged Device Model (NLV) Charged Device Model	2000 1000 N/A	V		
I <sub>LATCHUP</sub>	Latchup Performance (Note 4)	(NLV)	±100 ±500	mA		

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Applicable to devices with outputs that may be tri-stated.
- Applicable to devices with outputs that may be the stated.
   Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
   HBM tested to ANSI/ESDA/JEDEC JS-001-2017. CDM tested to EIA/JESD22-C101-F. JEDEC recommends that ESD qualification to EIA/JESD22-A115-A (Machine Model) be discontinued per JEDEC/JEP172A.
- 4. Tested to EIA/JESD78 Class II.

# **RECOMMENDED OPERATING CONDITIONS**

Symbol	Para	Min	Max	Unit	
V <sub>CC</sub>	Positive DC Supply Voltage		1.65	5.5	V
$V_{IN}$	DC Input Voltage		0	5.5	V
V <sub>OUT</sub>	DC Output Voltage	Active-Mode (High or Low State) Tri-State Mode (Note 1) Power-Down Mode (V <sub>CC</sub> = 0 V)	0 0 0	V <sub>CC</sub> 5.5 5.5	V
T <sub>A</sub>	Operating Temperature Range		-55	+125	°C
t <sub>r</sub> , t <sub>f</sub>	Input Transition Rise or Fall Rate	$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V} \\ V_{CC} = 2.3 \text{ V to } 2.7 \text{ V} \\ V_{CC} = 3.0 \text{ V to } 3.6 \text{ V} \\ V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	0 0 0	20 20 10 5	ns

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

#### DC ELECTRICAL CHARACTERISTICS

			V <sub>CC</sub>	Т,	4 = 25°C	2	-55°C ≤ T	<sub>A</sub> ≤ 125°C	
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Units
V <sub>IH</sub>	High-Level Input		1.65 to 1.95	0.65 V <sub>CC</sub>	_	_	0.65 V <sub>CC</sub>	-	V
	Voltage		2.3 to 5.5	0.70 V <sub>CC</sub>	-	-	0.70 V <sub>CC</sub>	-	
$V_{IL}$	Low-Level Input		1.65 to 1.95	-	-	0.35 V <sub>CC</sub>	-	0.35 V <sub>CC</sub>	V
	Voltage		2.3 to 5.5	-	-	0.30 V <sub>CC</sub>	-	0.30 V <sub>CC</sub>	
Vон	High-Level Output Voltage	$\begin{split} V_{IN} &= V_{IH} \text{ or } V_{IL} \\ I_{OH} &= -100  \mu\text{A} \\ I_{OH} &= -4 \text{ mA} \\ I_{OH} &= -8 \text{ mA} \\ I_{OH} &= -12 \text{ mA} \\ I_{OH} &= -16 \text{ mA} \\ I_{OH} &= -24 \text{ mA} \\ I_{OH} &= -32 \text{ mA} \end{split}$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5	V <sub>CC</sub> - 0.1 1.29 1.9 2.2 2.4 2.3 3.8	V <sub>CC</sub> 1.4 2.1 2.4 2.7 2.5 4.0	- - - - -	V <sub>CC</sub> - 0.1 1.29 1.9 2.2 2.4 2.3 3.8	- - - - -	٧
V <sub>OL</sub>	Low-Level Output Voltage	$\begin{split} V_{IN} &= V_{IH} \text{ or } V_{IL} \\ I_{OL} &= 100  \mu\text{A} \\ I_{OL} &= 4 \text{ mA} \\ I_{OL} &= 8 \text{ mA} \\ I_{OL} &= 12 \text{ mA} \\ I_{OL} &= 16 \text{ mA} \\ I_{OL} &= 24 \text{ mA} \\ I_{OL} &= 32 \text{ mA} \end{split}$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5	- - - -	- 0.08 0.2 0.22 0.28 0.38 0.42	0.1 0.24 0.3 0.4 0.4 0.55 0.55		0.1 0.24 0.3 0.4 0.4 0.55 0.55	٧
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> = 5.5 V or GND	1.65 to 5.5	-	-	±0.1	-	±1.0	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	V <sub>IN</sub> = 5.5 V or V <sub>OUT</sub> = 5.5 V	0	-	_	1.0	-	10	μΑ
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = V <sub>CC</sub> or GND	5.5	-	_	1.0	-	10	μΑ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


# **AC ELECTRICAL CHARACTERISTICS**

				T <sub>A</sub> = 25°C		-40°C ≤ T <sub>A</sub> ≤ 85°C		-55°C ≤ T <sub>A</sub> ≤ 125°C			
Symbol	Parameter	Condition	V <sub>CC</sub> (V)	Min	Тур	Max	Min	Max	Min	Max	Unit
tPLH, tPHL	Delay, A to Y (Figures 3 and 4)	$RL = 1 M\Omega$ , CL = 15 pF	1.65 to 1.95	ı	8.0	9.6	_	10.2	_	10.2	ns
		RL = 1 M $\Omega$ , CL = 15 pF	2.3 to 2.7	ı	3.0	5.2	_	5.8	_	5.8	
			3.0 to 3.6	-	2.3	3.6	-	4.0	-	4.0	
			4.5 to 5.5	-	1.8	2.9	-	3.2	-	3.2	
		RL = 500 Ω,	3.0 to 3.6	-	3.0	4.6	-	5.1	-	5.1	
		CL = 50 pF	4.5 to 5.5	-	2.4	3.8	_	4.2	_	4.2	

# **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0 V or V <sub>CC</sub>	2.5	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 5.5 \text{ V}, V_I = 0 \text{ V or } V_{CC}$	4.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 5)	10 MHz, $V_{CC}$ = 3.3 V, $V_{IN}$ = 0 V or $V_{CC}$ 10 MHz, $V_{CC}$ = 5.0 V, $V_{IN}$ = 0 V or $V_{CC}$	11 12.5	pF

<sup>5.</sup> C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in}$ )  $I_{CC}$ .  $C_{PD}$  is used to determine the no–load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in}$ )  $I_{CC} \cdot V_{CC}$ .

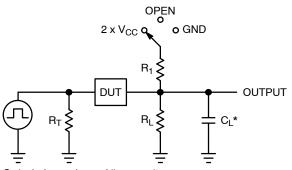

Test	Switch Position	C <sub>L</sub> , pF	$R_L, \Omega$	R <sub>1</sub> , Ω	
t <sub>PLH</sub> / t <sub>PHL</sub>	Open	See AC Characteristics Table			
t <sub>PLZ</sub> / t <sub>PZL</sub>	2 x V <sub>CC</sub>	50	500	500	
t <sub>PHZ</sub> / t <sub>PZH</sub>	GND	50	500	500	

X = Don't Care

 $C_L$  includes probe and jig capacitance  $R_T$  is  $Z_{OUT}$  of pulse generator (typically 50  $\Omega)$  f = 1 MHz

Figure 3. Test Circuit

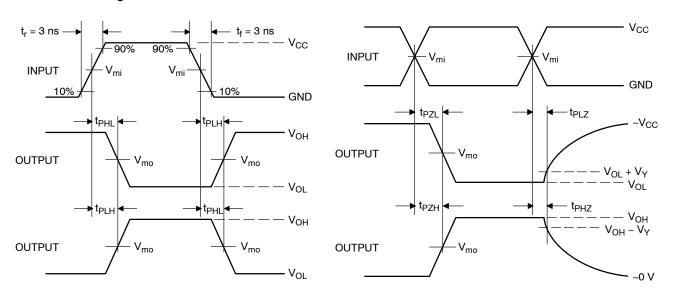


Figure 4. Switching Waveforms

		V		
V <sub>CC</sub> , V	V <sub>mi</sub> , V	t <sub>PLH</sub> , t <sub>PHL</sub> t <sub>PZL</sub> , t <sub>PLZ</sub> , t <sub>PZH</sub> , t <sub>PHZ</sub>		V <sub>Y</sub> , V
1.65 to 1.95	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.15
2.3 to 2.7	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.15
3.0 to 3.6	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.3
4.5 to 5.5	V <sub>CC</sub> /2	V <sub>CC</sub> /2	V <sub>CC</sub> /2	0.3

# **ORDERING INFORMATION**

Device	Package	Specific Device Code	Pin1 Orientation (See bellow)	Shipping <sup>†</sup>
NL27WZ16DFT2G	SC-88	MR	Q4	3000 / Tape & Reel
NLV27WZ16DFT2G*	SC-88	MR	Q4	3000 / Tape & Reel
NL27WZ16DBVT1G	SC-74	MR	Q4	3000 / Tape & Reel
NL27WZ16MU1TCG	UDFN6, 1.45 x 1.0, 0.5P	F (Rotated 90° CW)	Q4	3000 / Tape & Reel
NLV27WZ16MU1TCG* (In Development)	UDFN6, 1.45 x 1.0, 0.5P	F (Rotated 90° CW)	Q4	3000 / Tape & Reel
NL27WZ16MU3TCG	UDFN6, 1.0 x 1.0, 0.35P	T (Rotated 90° CW)	Q4	3000 / Tape & Reel
NL27WZ16MU2TCG	UDFN6, 1.2 x 1.0, 0.4P	5 (Rotated 180° CW)	Q4	3000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP

# Pin 1 Orientation in Tape and Reel

# Direction of Feed





Capable.

#### PACKAGE DIMENSIONS

# SC-88/SC70-6/SOT-363

CASE 419B-02 **ISSUE Y** 

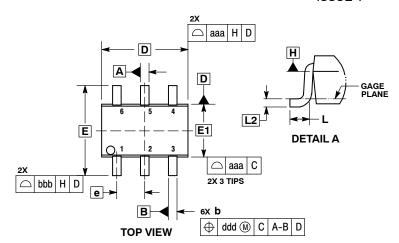

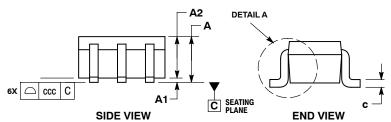


- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END.
  4. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AND DATUM H.
  5. DATUMS A AND B ARE DETERMINED AT DATUM H.
  6. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.
  7. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION

- DIMENSION 5 DOES NOT INCLUDE DAMBAR PROTRUSION.
  ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN
  EXCESS OF DIMENSION 5 AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER

	MIL	LIMETE	RS		INCHES	3
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α			1.10			0.043
A1	0.00		0.10	0.000		0.004
A2	0.70	0.90	1.00	0.027	0.035	0.039
b	0.15	0.20	0.25	0.006	0.008	0.010
С	0.08	0.15	0.22	0.003	0.006	0.009
D	1.80	2.00	2.20	0.070	0.078	0.086
E	2.00	2.10	2.20	0.078	0.082	0.086
E1	1.15	1.25	1.35	0.045	0.049	0.053
е		0.65 BS	С	0	.026 BS	С
L	0.26	0.36	0.46	0.010	0.014	0.018
L2		0.15 BS	C	(	0.006 BS	SC
aaa	0.15				0.006	
bbb	0.30				0.012	
ccc	0.10				0.004	
ddd		0.10			0.004	


#### **RECOMMENDED SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **PACKAGE DIMENSIONS**


SC-74 CASE 318F-05 ISSUE N

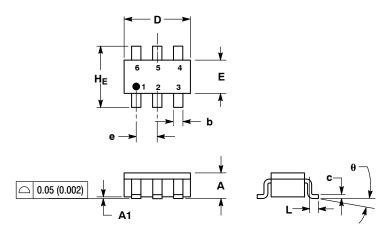

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH
  THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM
  THICKNESS OF BASE MATERIAL.
  4. 318F-01, -02, -03, -04 OBSOLETE. NEW STANDARD 318F-05.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.90	1.00	1.10	0.035	0.039	0.043
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.25	0.37	0.50	0.010	0.015	0.020
С	0.10	0.18	0.26	0.004	0.007	0.010
D	2.90	3.00	3.10	0.114	0.118	0.122
E	1.30	1.50	1.70	0.051	0.059	0.067
е	0.85	0.95	1.05	0.034	0.037	0.041
L	0.20	0.40	0.60	0.008	0.016	0.024
HE	2.50	2.75	3.00	0.099	0.108	0.118
θ	0°	_	10°	0°	_	10°


# **SOLDERING FOOTPRINT\***

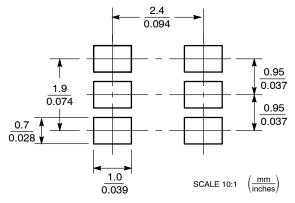

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **PACKAGE DIMENSIONS**


# **UDFN6, 1.2x1.0, 0.4P**CASE 517AA-01 ISSUE D

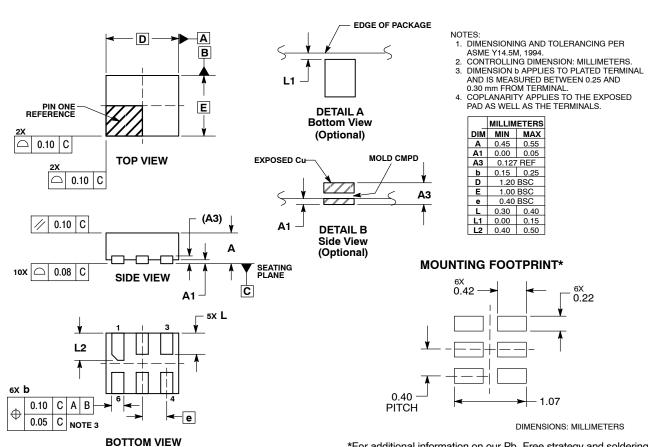

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


#### **PACKAGE DIMENSIONS**

UDFN6, 1.45x1.0, 0.5P CASE 517AQ ISSUE O

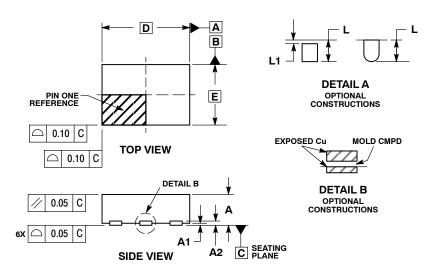


- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

	MILLIMETERS		
DIM	MIN	MAX	
Α	0.45	0.55	
A1	0.00	0.05	
A2	0.07 REF		
b	0.20	0.30	
D	1.45 BSC		
Е	1.00 BSC		
Ф	0.50 BSC		
L	0.30	0.40	
L1		0.15	



# **MOUNTING FOOTPRINT**




DIMENSIONS: MILLIMETERS

<sup>\*</sup>For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### PACKAGE DIMENSIONS

UDFN6, 1x1, 0.35P CASE 517BX **ISSUE O** 

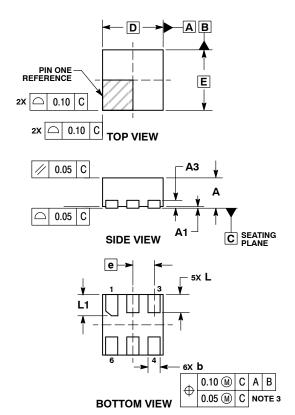


#### NOTES

- DIMENSIONING AND TOLERANCING PER
- ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSION 6 APPLIES TO PLATED
  TERMINAL AND IS MEASURED BETWEEN
- 0.15 AND 0.20 MM FROM TERMINAL TIP. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

	MILLIMETERS	
DIM	MIN	MAX
Α	0.45	0.55
A1	0.00	0.05
A3	0.13 REF	
b	0.12	0.22
D	1.00 BSC	
E	1.00 BSC	
е	0.35 BSC	
L	0.25	0.35
L1	0.30	0.40

#### **RECOMMENDED SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and (III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability. arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification designed, intended, of authorized but use as a component minimum support systems of any DD acceptance of the minimum support systems of any DD acceptance of the minimum support systems o expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# onsemi:

NL27WZ16DFT2 NL27WZ16DFT2G NL27WZ16DTT1 NL27WZ16DTT1G NL27WZ16DFT2G NL27WZ16MU3TCG NL27WZ16MU3TCG NL27WZ16MU3TCG